


**MAXIMUM SHEAVE LOADS:**  
 LONGITUDINAL (0°) 1750kg  
 TRANSVERSE (90°) 1225kg  
 COMBINED 8750kg

**MAX ROPE TENSION (kg)**

DEFLECTION ANGLE 'A' (°)	BISECTED ENTRY	STRAIGHT ENTRY
15	5750	5650
30	2900	2710
45	1960	1690
60	1500	1180
90	1060	740

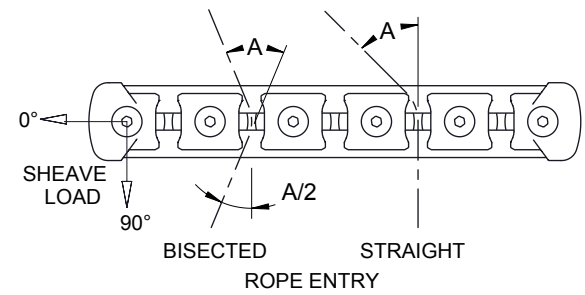

**SHEAVE SPACING:**  
 STANDARD SHEAVE SPACING SHOWN.  
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

**WEIGHT:**  
 1338g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)  
 TITANIUM OPTION AVAILABLE (913g) - CONTACT SPINLOCK FOR MORE INFORMATION.

**INSTALLATION:**  
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

**spinlock**  
 BE ADVENTURE-PROOF

**WARNING:**  
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.  
**COPYRIGHT:**  
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM  
 SCALE 1:4  
 PAGE SIZE (297 x 210)  
 A4

DATE:	SEP17
LINE SIZE:	Ø13 MAX
FASTENERS:	10 x M8
MAX LOAD:	SEE TABLE

**TSR20L/10**