


MAXIMUM SHEAVE LOADS:

| | |
|-------------------|--------|
| LONGITUDINAL (0°) | 1750kg |
| TRANSVERSE (90°) | 1225kg |
| COMBINED | 1750kg |

MAX ROPE TENSION (kg)

| DEFLECTION ANGLE 'A' (°) | BISECTED ENTRY | STRAIGHT ENTRY |
|--------------------------|----------------|----------------|
| 15 | 6700 | 6590 |
| 30 | 3380 | 3160 |
| 45 | 2290 | 1970 |
| 60 | 1750 | 1380 |
| 90 | 1240 | 870 |

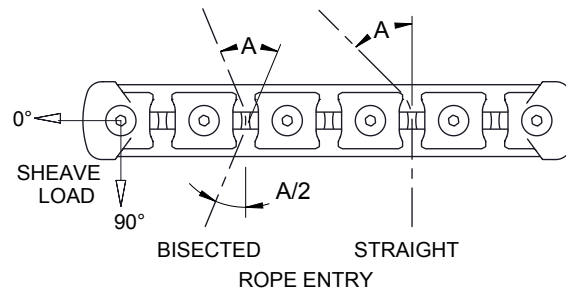

SHEAVE SPACING:

STANDARD SHEAVE SPACING SHOWN.
CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

WEIGHT:

268g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)
TITANIUM OPTION AVAILABLE (183g) - CONTACT SPINLOCK FOR MORE INFORMATION.

INSTALLATION:

MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

spinlock
BE ADVENTURE-PROOF



WARNING:
IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE

1:2

PAGE SIZE
(297 x 210)

A4

DATE:

NOV 17

LINE SIZE:

Ø13 MAX

FASTENERS:

2 x M8

MAX LOAD:

SEE TABLE

TSR20L/2