


MAXIMUM SHEAVE LOADS:
 LONGITUDINAL (0°) 1750kg
 TRANSVERSE (90°) 1225kg
 COMBINED 2625kg

MAX ROPE TENSION (kg)

DEFLECTION ANGLE 'A' (°)	BISECTED ENTRY	STRAIGHT ENTRY
15	6700	6590
30	3380	3160
45	2290	1970
60	1750	1380
90	1240	870

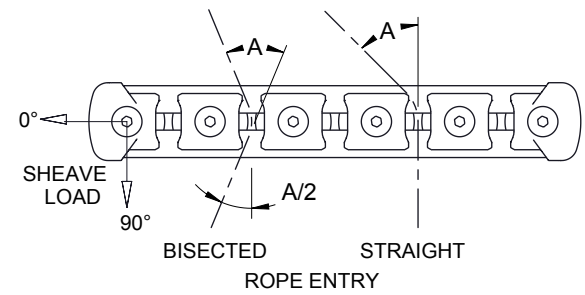

SHEAVE SPACING:
 STANDARD SHEAVE SPACING SHOWN.
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

WEIGHT:
 401g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)
 TITANIUM OPTION AVAILABLE (274g) - CONTACT SPINLOCK FOR MORE INFORMATION.

INSTALLATION:
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

spinlock
 BE ADVENTURE-PROOF

WARNING:
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.
COPYRIGHT:
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM
 SCALE 1:2
 PAGE SIZE (297 x 210)
 A4

DATE: NOV 17
 LINE SIZE: Ø13 MAX
 FASTENERS: 3 x M8
 MAX LOAD: SEE TABLE

TSR20L/3