


**MAXIMUM SHEAVE LOADS:**  
 LONGITUDINAL (0°) 1750kg  
 TRANSVERSE (90°) 1225kg  
 COMBINED 5250kg

MAX ROPE TENSION (kg)		
DEFLECTION	BISECTED	STRAIGHT
ANGLE 'A' (°)	ENTRY	ENTRY
15	6700	6590
30	3380	3160
45	2290	1970
60	1750	1380
90	1240	870

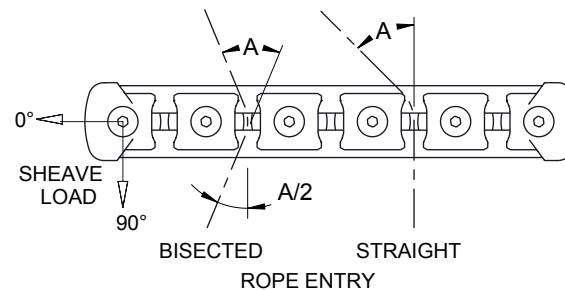

**SHEAVE SPACING:**  
 STANDARD SHEAVE SPACING SHOWN.  
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

**WEIGHT:**  
 803g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)  
 TITANIUM OPTION AVAILABLE (548g) - CONTACT SPINLOCK FOR MORE INFORMATION.

**INSTALLATION:**  
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

**spinlock**  
 BE ADVENTURE-PROOF



**WARNING:**  
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS.



**COPYRIGHT:**  
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE

1:2

PAGE SIZE  
 (297 x 210)

A4

DATE: NOV 17

LINE SIZE: Ø13 MAX

FASTENERS: 6 x M8

MAX LOAD: SEE TABLE

**TSR20L/6**