






DEFLECTION ANGLE

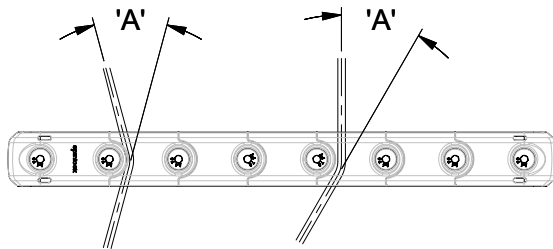

BISECTED ROPE ENTRY

STRAIGHT ROPE ENTRY

Rope Deflection Angle (°)	Max Rope Tension (kg)
10	2290
15	1530
30	770
45	520
60	400
90	280

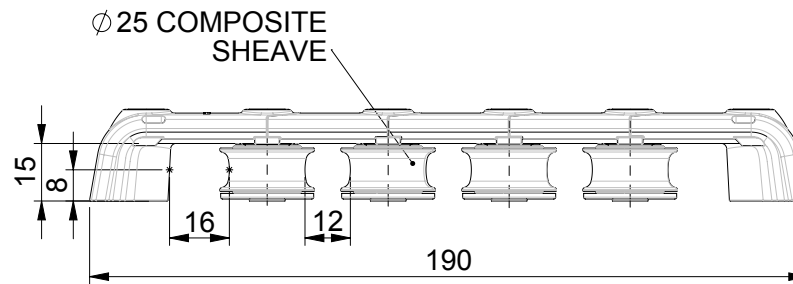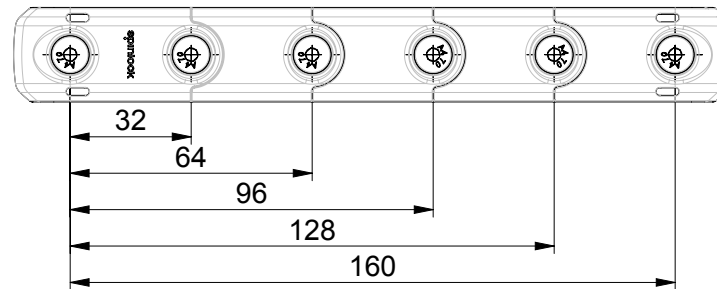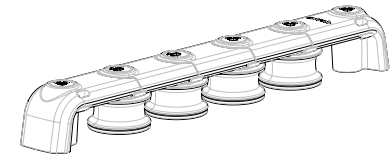

**spinlock**  
BE ADVENTURE-PROOF



**WARNING:**  
IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



**COPYRIGHT:**  
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE PAGE SIZE DATE

1:2 A4 APR 2018

FASTENERS

M5 CSK x 6

MAX LINE SIZE

10mm

WEIGHT

106g

SWL PER SHEAVE

400kg

SWL PER UNIT

1200kg

**T25-4**

FOR MORE INFO CONTACT  
SPT@SPINLOCK.CO.UK