

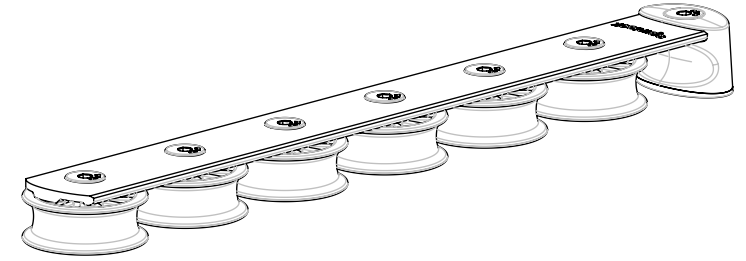
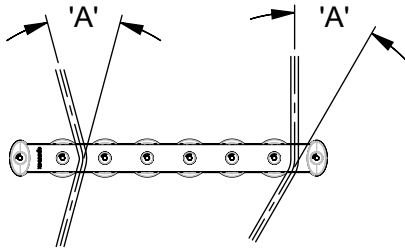
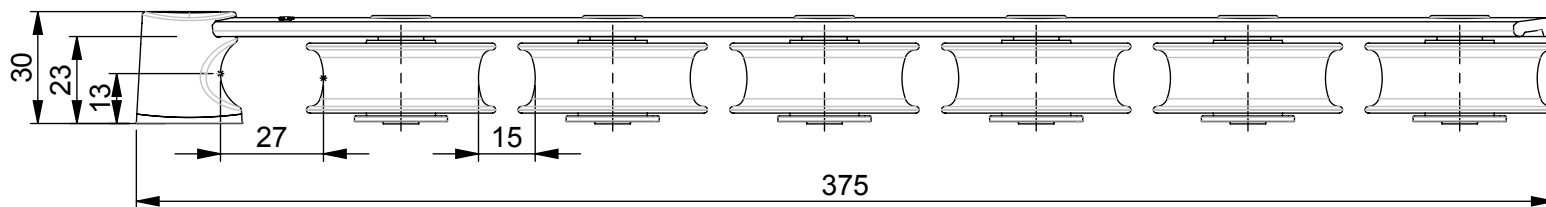


DEFLECTION ANGLE



Ø 50 COMPOSITE SHEAVE (T50/6Y)
ALLOY SHEAVE (T50/6YA)

ROPE DEFLECTION ANGLE 'A' (°)	MAX ROPE TENSION (kg)
10	5740
15	3830
30	1930
45	1310
60	1000
90	710

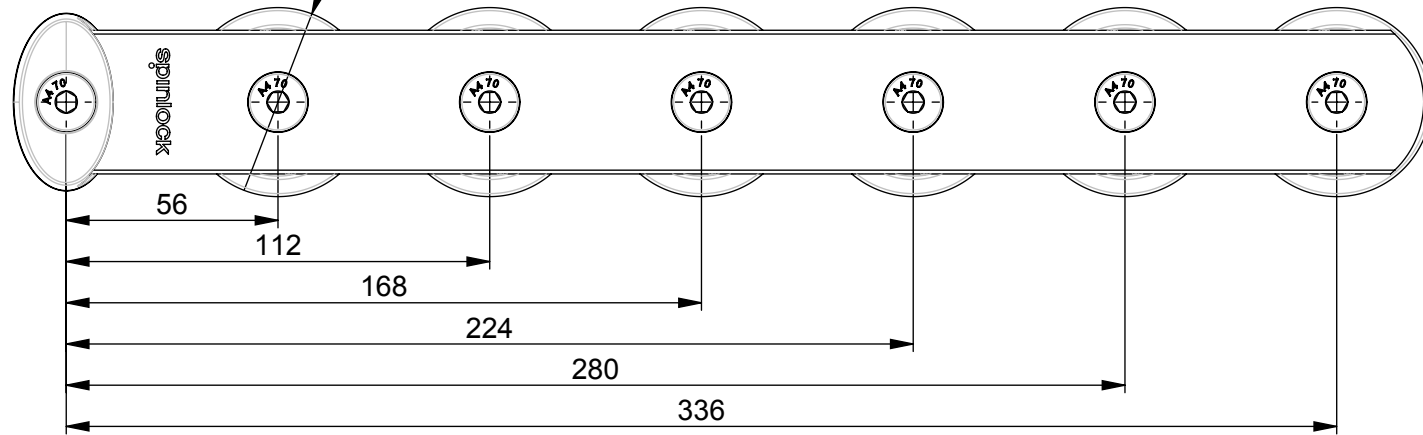

spinlock
BE ADVENTURE-PROOF



WARNING:
IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE PAGE SIZE DATE

1:2 A4 APR 2018

MAX LINE SIZE
14mm
FASTENERS
M8 CSK
x 7

PRODUCT CODE

T50-6Y
T50-6YA

WEIGHT

490g
560g

SWL PER SHEAVE

1000kg
1000kg

SWL PER UNIT

3000kg
3000kg

T50-6Y

FOR MORE INFO CONTACT
SPT@SPINLOCK.CO.UK