
## ROPE DEFLECTION ANGLE








BISECTED	
ROPE ENTRY	

STRAIGHT ROPE ENTRY

DEFLECTION ANGLE, 'A' (°)	MAX TENSION (kg)
10	8610
15	5750
30	2900
45	1960
60	1500
90	1060

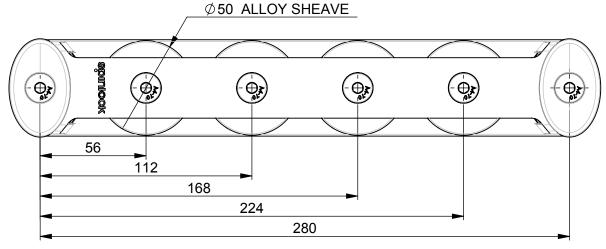



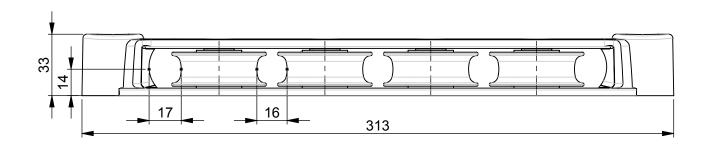





IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

	1:2	A4	APF 2018
<u>'S</u>	SCALE	PAGE SIZE	DATE
RF	ALL DIN	IENSIONS	IN MM

ĽΕ	DATE	-
	APR 2018	

Ø14mm	M8 CSK x 6	900g

WEIGHT

MAX LINE SIZE FASTENERS

SWL PER	TOTAL SWL
SHAVE	PER UNIT
1500kg	3000kg

TC50/4 FOR MORE INFO CONTACT

SPT@SPINLOCK.CO.UK