


MAXIMUM SHEAVE LOADS:
 LONGITUDINAL (0°) 1750kg
 TRANSVERSE (90°) 1225kg
 COMBINED 3500kg

MAX ROPE TENSION (kg)		
DEFLECTION	BISECTED	STRAIGHT
ANGLE 'A' (°)	ENTRY	ENTRY
15	6700	6590
30	3380	3160
45	2290	1970
60	1750	1380
90	1240	870

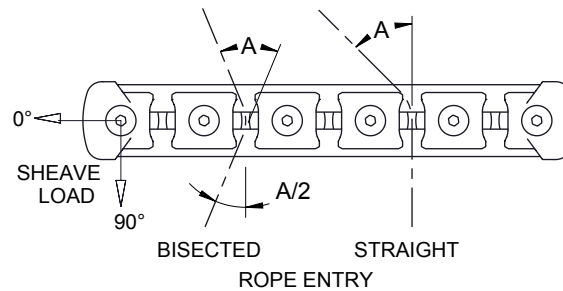

SHEAVE SPACING:
 STANDARD SHEAVE SPACING SHOWN.
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

WEIGHT:
 535g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)
 TITANIUM OPTION AVAILABLE (365g) - CONTACT SPINLOCK FOR MORE INFORMATION.

INSTALLATION:
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

spinlock
 BE ADVENTURE-PROOF

WARNING:
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS.
COPYRIGHT:
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE

1:2

PAGE SIZE
 (297 x 210)

A4

DATE: NOV 17

LINE SIZE: Ø13 MAX

FASTENERS: 4 x M8

MAX LOAD: SEE TABLE

TSR20L/4