


**MAXIMUM SHEAVE LOADS:**  
 LONGITUDINAL (0°) 2500kg  
 TRANSVERSE (90°) 1750kg  
 COMBINED 2500kg

**MAX ROPE TENSION (kg)**

DEFLECTION ANGLE 'A' (°)	BISECTED ENTRY	STRAIGHT ENTRY
15	9580	9410
30	4830	4510
45	3270	2820
60	2500	1960
90	1770	1240

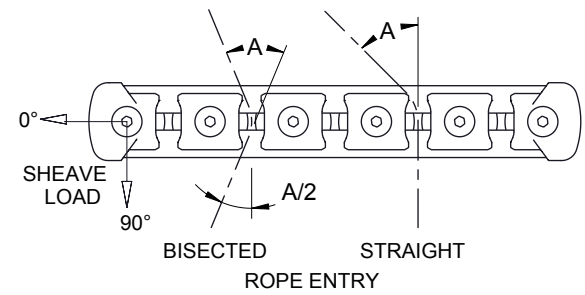

**SHEAVE SPACING:**  
 STANDARD SHEAVE SPACING SHOWN.  
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

**WEIGHT:**  
 350g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)  
 TITANIUM OPTION AVAILABLE (238g) - CONTACT SPINLOCK FOR MORE INFORMATION.

**INSTALLATION:**  
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

**spinlock**  
 BE ADVENTURE-PROOF

**WARNING:**  
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.  
**COPYRIGHT:**  
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM  
 SCALE 1:2  
 PAGE SIZE (297 x 210)  
 A4

DATE: OCT17  
 LINE SIZE: Ø15 MAX  
 FASTENERS: 2 x M8  
 MAX LOAD: SEE TABLE

**TSR30L/2**