


**MAXIMUM SHEAVE LOADS:**

|                   |        |
|-------------------|--------|
| LONGITUDINAL (0°) | 2500kg |
| TRANSVERSE (90°)  | 1750kg |
| COMBINED          | 5000kg |

**MAX ROPE TENSION (kg)**

| DEFLECTION ANGLE 'A' (°) | BISECTED ENTRY | STRAIGHT ENTRY |
|--------------------------|----------------|----------------|
| 15                       | 9580           | 9410           |
| 30                       | 4830           | 4510           |
| 45                       | 3270           | 2820           |
| 60                       | 2500           | 1960           |
| 90                       | 1770           | 1240           |

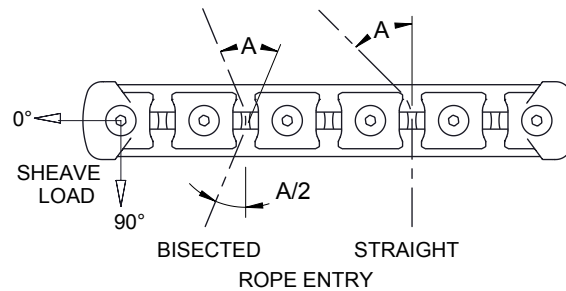

**SHEAVE SPACING:**

STANDARD SHEAVE SPACING SHOWN.  
CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

**WEIGHT:**

704g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)  
TITANIUM OPTION AVAILABLE (479g) - CONTACT SPINLOCK FOR MORE INFORMATION.

**INSTALLATION:**

MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

**spinlock**  
BE ADVENTURE-PROOF



**WARNING:**  
IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.



**COPYRIGHT:**  
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE

1:2

PAGE SIZE  
(297 x 210)

A4

DATE:

OCT17

LINE SIZE:

Ø15 MAX

FASTENERS:

4 x M8

MAX LOAD:

SEE TABLE

**TSR30L/4**