


MAXIMUM SHEAVE LOADS:
 LONGITUDINAL (0°) 2500kg
 TRANSVERSE (90°) 1750kg
 COMBINED 8750kg

MAX ROPE TENSION (kg)		STRAIGHT ENTRY
DEFLECTION ANGLE 'A' (°)	BISECTED ENTRY	
15	9580	9410
30	4830	4510
45	3270	2820
60	2500	1960
90	1770	1240

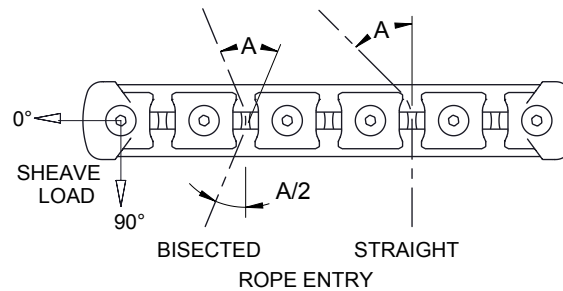

SHEAVE SPACING:
 STANDARD SHEAVE SPACING SHOWN.
 CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

WEIGHT:
 1235g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)
 TITANIUM OPTION AVAILABLE (840g) - CONTACT SPINLOCK FOR MORE INFORMATION.

INSTALLATION:
 MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

spinlock
 BE ADVENTURE-PROOF

WARNING:
 IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS.
COPYRIGHT:
 THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM
 SCALE 1:2
 PAGE SIZE (297 x 210)
 A4

DATE: OCT17
 LINE SIZE: Ø15 MAX
 FASTENERS: 7 x M8
 MAX LOAD: SEE TABLE

TSR30L/7