


**MAXIMUM SHEAVE LOADS:**

LONGITUDINAL (0°)	1500kg
TRANSVERSE (90°)	1050kg
COMBINED	1500kg

**MAX ROPE TENSION (kg)**

DEFLECTION ANGLE 'A' (°)	BISECTED ENTRY	STRAIGHT ENTRY
15	9580	9410
30	4830	4510
45	3270	2820
60	2500	1960
90	1770	1240

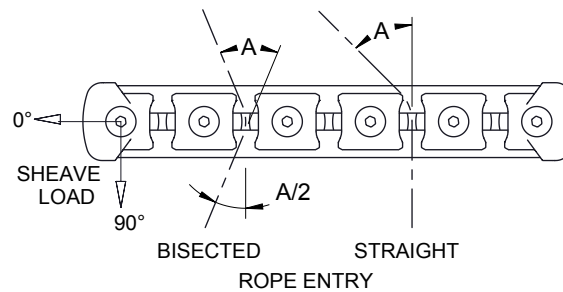

**SHEAVE SPACING:**

STANDARD SHEAVE SPACING SHOWN.  
CUSTOM SPACING AVAILABLE IN 1.0MM INCREMENTS.

**WEIGHT:**

319g (INCLUDING FULL LENGTH STAINLESS STEEL DECK FIXINGS)  
TITANIUM OPTION AVAILABLE (215g) - CONTACT SPINLOCK FOR MORE INFORMATION.

**INSTALLATION:**

MOUNTING SURFACE MUST BE SUFFICIENTLY STRONG AND STIFF TO WITHSTAND COMPRESSIVE AND SHEAR FORCES EXERTED BY SHEAVE LOADING

**spinlock**  
BE ADVENTURE-PROOF



**WARNING:**  
IF USING AS TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS.



**COPYRIGHT:**  
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM

SCALE

1:2

PAGE SIZE  
(297 x 210)

A4

DATE:

OCT17

LINE SIZE:

Ø13 MAX

FASTENERS:

2 x M8

MAX LOAD:

SEE TABLE

**TSR20/2**